



Better Value • Better Options • Better Lighting



LED
Off-Road Lights



Z2120
Combination Spot/Flood
Light Bar Display

Power: 12.8VDC - 6.8A, Rocker Switch
4.8 lbs. / 25" x 14" x 6"



For more information, scan this
QR code with your mobile device

www.optronicsinc.com

ZH2018LB


**LED LIFETIME
WARRANTY**

LED LIGHTS

SMD LED TECHNOLOGY FOR LONG TERM RELIABILITY

UCL22CB FLOOD SPOT

33"

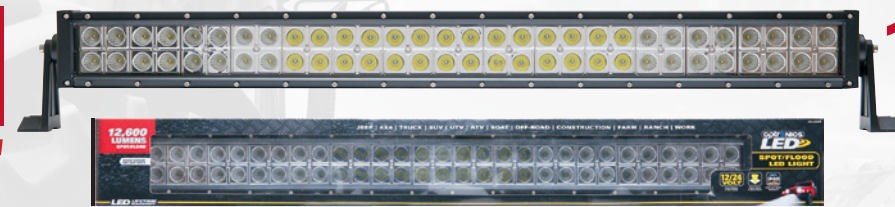


12,600 RAW
6777 EFFECTIVE
LUMEN OUTPUT

- Heavy duty aluminum housing and polycarbonate lens
- Dual power - use with 12VDC and 24VDC systems
- IP65 rated for dust and water resistance
- White LEDs emit 6000K daylight white beam
- Hard wired
- Packaged individually, in color box

BULK PART NUMBER	DESCRIPTION	VOLTAGE RANGE	DIODES	CASE QTY
UCL22CB	Flood Beam Spot Beam	12-24VDC	60 SMD	1
MATERIALS	Polycarbonate lens, aluminum housing, stainless steel hardware			
WT/DIMS	5.625 lbs. / 33" W x 3" H x 3.5" D, without brackets			
VOLT/AMP	12.8VDC - 9.8A, 24.0VDC - 5.7A			
WARRANTY	Lifetime LED Warranty			

UCL20CB FLOOD SPOT

22"

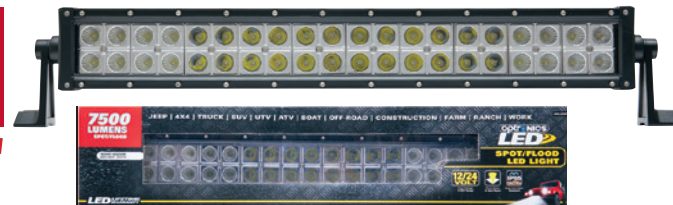

7500 RAW
4521 EFFECTIVE
LUMEN OUTPUT

- Heavy duty aluminum housing and polycarbonate lens
- Dual power - use with 12VDC and 24VDC systems
- IP65 rated for dust and water resistance
- White LEDs emit 6000K daylight white beam
- Hard wired
- Packaged individually, in color box

BULK PART NUMBER	DESCRIPTION	VOLTAGE RANGE	DIODES	CASE QTY
UCL20CB	Flood Beam Spot Beam	12-24VDC	40 SMD	1
MATERIALS	Polycarbonate lens, aluminum housing, stainless steel hardware			
WT/DIMS	4.8 lbs. / 22" W x 3" H x 3.5" D, without brackets			
VOLT/AMP	12.8VDC - 6.8A, 24.0VDC - 3.1A			
WARRANTY	Lifetime LED Warranty			

UCL21CB FLOOD SPOT

13"



5000 RAW
2700 EFFECTIVE
LUMEN OUTPUT

- Heavy duty aluminum housing and polycarbonate lens
- Dual power - use with 12VDC and 24VDC systems
- IP65 rated for dust and water resistance
- White LEDs emit 6000K daylight white beam
- Hard wired
- Packaged individually, in color box

BULK PART NUMBER	DESCRIPTION	VOLTAGE RANGE	DIODES	CASE QTY
UCL21CB	Flood Beam Spot Beam	12-24VDC	24 SMD	1
MATERIALS	Polycarbonate lens, aluminum housing, stainless steel hardware			
WT/DIMS	3.19 lbs. / 13.25" W x 3" H x 3.5" D, without brackets			
VOLT/AMP	12.8VDC - 4A, 24.0VDC - 1.8A			
WARRANTY	Lifetime LED Warranty			

LED LIFETIME WARRANTY

HEAVY DUTY CONSTRUCTION FOR DURABILITY AND PERFORMANCE

2520 RAW
1550 EFFECTIVE
LUMEN OUTPUT



UCL23CB FLOOD SPOT

9"

BULK PART NUMBER	DESCRIPTION	VOLTAGE RANGE	DIODES	CASE QTY
UCL23CB	Flood Beam Spot Beam	12-24VDC	12 SMD	1
MATERIALS	Polycarbonate lens, aluminum housing, stainless steel hardware			
WT/DIMS	2.4 lbs. / 7.25" W x 3" H x 3.5" D, without brackets			
VOLT/AMP	12.8VDC - 3A, 24.0VDC - 1.5A			
WARRANTY	Lifetime LED Warranty			

- Heavy duty aluminum housing and polycarbonate lens
- Dual power - use with 12VDC and 24VDC systems
- IP65 rated for dust and water resistance
- White LEDs emit 6000K daylight white beam, 36W
- Hard wired
- Packaged individually, in color box

7200 RAW
4000 EFFECTIVE
LUMEN OUTPUT

AUXILIARY
RED LED
TURN FUNCTION



UCL32CDB FLOOD TURN

30"

BULK PART NUMBER	DESCRIPTION	VOLTAGE RANGE	DIODES	CASE QTY
UCL32CDB	Flood Beam Turn Function	12-24VDC	12 White 6 Red	1
MATERIALS	Polycarbonate lens, aluminum housing, stainless steel hardware			
WT/DIMS	4.8 lbs. / 29.6" W x 2.3" H x 2.875" D, without brackets			
VOLT/AMP	12.8VDC - 6.8A, 24.0VDC - 3.1A			
WARRANTY	Lifetime LED Warranty			

- Central white LEDs produce bright flood beam, red LEDs on left and right ends provide supplemental turn function
- Heavy duty aluminum housing and polycarbonate lens
- Dual power: use with 12VDC and 24VDC systems
- Adjustable, sliding brackets for mounting versatility
- IP65 rated for dust and water resistance
- Hard wired with 24-in. leads (4-wire)

1800 RAW
780 EFFECTIVE
LUMEN OUTPUT

BULK PART NUMBER	DESCRIPTION	VOLTAGE RANGE	DIODES	CASE QTY
UCL24CB	Flood Beam Post Mount	12 VDC	6 SMD	1
UCL24CFB	Flood Beam Recess Flange	12 VDC	6 SMD	1

MATERIALS Polycarbonate lens, aluminum housing, stainless steel hardware
WT/DIMS Post Mount 1.2 lbs. / 3.25" W x 3" H x 2.75" D, without bracket
Recess Flange 1.2 lbs. / 4.25" W x 3.625 H x 2.75" D
VOLT/AMP 12.8VDC - 1.4A
WARRANTY Lifetime LED Warranty



UCL24CB UCL24CFB FLOOD

3"



- Heavy duty aluminum housing and polycarbonate lens
- IP65 rated for dust and water resistance
- White LEDs emit 6000K daylight white beam, 18W
- Hard wired with 16in leads
- Packaged individually, in color box

BULK PART NUMBER	DESCRIPTION	CASE QTY
BK20BB	Mounting Bracket Kit for UCL20, 21, 22, 23 light bars	25

MATERIALS Aluminum brackets, stainless steel hardware

BK20BB